




BETTER, STRONGER, FASTER
...and Greener!

CONTACT INFORMATION

Fabcon-USA.com - (877) 4-FABCON
 Minneapolis Area: Savage, MN - (952) 890-4444
 Indianapolis Area: Carmel, IN - (317) 566-6622
 Allentown, PA - (610) 530-4470
 Columbus Area: Grove City, OH - (614) 875-8601

FABCON COMPANY BACKGROUND

Fabcon, an ISO 9001 registered manufacturer and member of the U.S. Green Building Council, leverages its 37-years of experience and a strong commitment to innovation to help construct energy efficient commercial, industrial and other buildings quickly and cost-effectively. Fabcon produces more than 16 million square feet of precast concrete wall panels annually for customers in North America. Its production facilities in Indiana, Minnesota, Ohio and Pennsylvania have completed more than 8,500 precast projects, ranging from 10,000 square-foot retail stores to million-square-foot distribution centers and 16-story housing facilities. Visit www.fabcon-usa.com for more information.

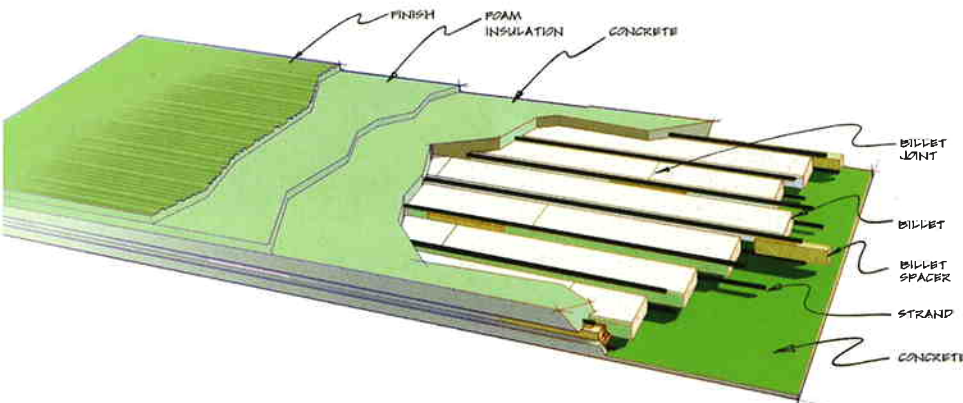

VersaCore+Green™

POTENTIAL LEED PROJECT POINTS:

Optimized Energy Performance	1-10 Points
Low Site Impact	1 Point
Recycled Content	2 Points
Regional Materials	2 Points
Low Emitting Adhesives	1 Point
Innovation in Design	1-4 Points

VersaCore+Green™ panels contain as much as 58 percent recycled content and are more energy efficient than other products in the market. The new panels test an average of three points higher in R-value, which contractors and architects use to measure the energy efficiency of building materials. This increase can represent significant savings to building owners, as the U.S. Department of Energy reports that nearly half of all energy loss is due to poor insulation.



Effective R-Values by Heating Zone

-Effective R-value is computed using Table 502.2.1.1.2 (3) from the 2000 International Energy Conservation Code
 -For internal use only

	Heating Degree Days	VersaCore Plus™			VersaCore+Green™			VersaCore+Green™ Sandwich
		8"	10"	12"	8"	10"	12"	12" EPS
Zone A	8001+	R-7	R-9	R-10	R-10	R-12	R-14	R-24
Zone B	6501-8000	R-8	R-10	R-11	R-11	R-14	R-16	R-24
Zone C	5501-6500	R-9	R-11	R-13	R-12	R-16	R-19	R-24
Zone D	4001-5500	R-10	R-12	R-14	R-13	R-16	R-20	R-24
Zone E	2001-4000	R-10	R-12	R-14	R-13	R-18	R-21	R-24
Product Characteristic								
Unit Weight		50 psf	54 psf	59 psf	46.5 psf	50.5 psf	55 psf	65 psf

*VersaCore+Green contains up to 58% post-consumer and post-industrial recycled content by materials value